


# 200

## MULTI-TRACK SLIDING DOOR SYSTEM



### FEATURES

- 1-3/4" thick profile
- Compatible with 1/4", 3/8", 1/2", and 1" glazing thickness
- Other glazing thicknesses available upon request
- Vertical stiles available: 2"
- Horizontal rails available: 1", 1-3/4", 2-3/8", 3-1/4", 4-1/8", 5-1/2", 7", 8", 10", 12"
- Horizontal rails can be combined to create multiple sizes as desired
- Custom gaskets and components used to optimize performance of system
- Surface mount and concealed track options available

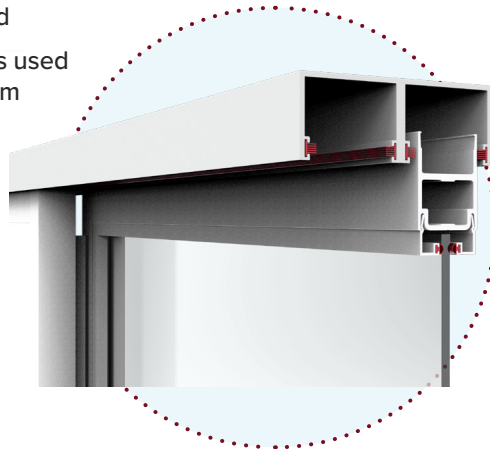


### MATERIALS

- All aluminum 6063-T6 tempered
- All aluminum to be 6063-T6 tempered
- Interior/exterior glazing gaskets: extruded EPDM – 60 durometer
- Aluminum and Stainless-steel anchors and fasteners
- Mechanically fastened and 8-point welding

### BENEFITS

The Windspec 200 sliding door multi-track system allows various configurations and applications by utilizing sealed interlocking verticals and headers ideal for classroom, office, and institutional partitions.

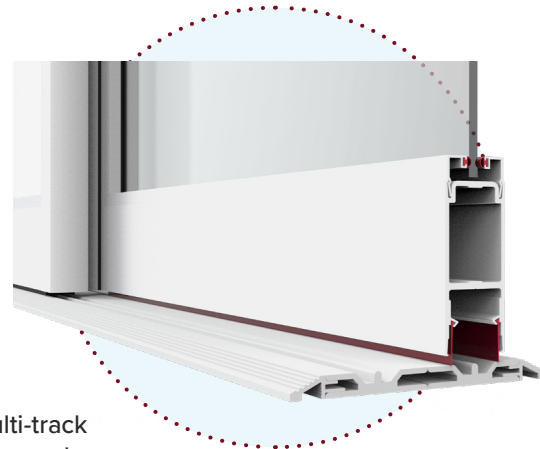

### FINISHES

- Standard anodic finishes available in class I (0.0004) and class II (0.0007)
- Clear Anodized .0004
- Clear Anodized .0007
- #40 Bronze Anodized .0007
- #26 light Bronze Anodized .0007
- Champagne Anodized .0007
- Black Anodized .0007
- Acid Etch Anodizing process
- Painted finishes available:
  - Duracron (one-coat)
  - Duranar (2 coat)
  - Duranar XL (3 coat)
- Powder coating available
- Wood grain finishes available (Decoral USA)

**ADAPT / INNOVATE / DELIVER**