

**ANSI/NFRC 100**

Procedure for Determining Fenestration Product U-factors

ANSI/NFRC 200

Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence

NFRC 500

Procedure for Determining Fenestration Product Condensation Resistance Values

Fenestration Simulation Report

720 Single Slider

Report Number

WIN16042w-b

Wednesday, February 10, 2016

Prepared For

Oren Anava

Windspec Inc.

1310 Creditstone Road

Concord, Ontario

L4K 5T7

(905)-738-8311

Prepared By

MMM Group, Ltd.

582 Lancaster, West

Kitchener, Ontario, N2R 1L5

519-743-8777

TABLE OF CONTENTS

--	--

PG.	T I T L E
3	Product Line Description
4	Report Information
5	Simulation Notes
6	Baseline Product
7	Glazing Library for Manufacturer
8	NFRC Simulation Data
9	Appendix A Product Drawings

Manufacturer:	Windspec Inc.
Report Number:	WIN16042w-b
Product Line:	720 Single Slider
Frame:	Thermally Broken Aluminum
Sash:	Thermally Broken Aluminum
Thermal Break:	U
Edge of Glass:	Interior edges are held by EPDM gaskets. Exterior edges are held by foam glazing tape.
Glazing:	6mm Generic Clear glass (Cl), 6mm PPG Solarban 60 (SB60), 90% argon 10% Air fill (arg).
Spacer:	Superspacer Triseal with silicone secondary seal (ts).
Weatherstripping:	Mohair on the sash.
General:	This product line includes the 720 Single Slider manufactured by Windspec Inc.

Tyler
McPherson

Digitally signed by Tyler
McPherson
DN: cn=Tyler
McPherson, o=MMM
Group, ou=Fenestration
Services,
email=mcpherson@m
mm.ca, c=CA
Date: 2016.02.19
12:57:23 -05'00'

Tyler McPherson
Simulator

Michael
Barclay

Digitally signed by Michael
Barclay
DN: cn=Michael Barclay,
o=MMM Group Ltd,
ou=Fenestration Services,
email=barclaym@mmm.ca
, c=CA
Date: 2016.02.23 11:13:34
-05'00'

Simulator in Responsible Charge

WINDOW SIMULATION REPORT

The windows documented in this report were simulated in accordance with the ANSI/NFRC 100: Procedure for Determining Fenestration Product U-Factors (2014), ANSI/NFRC 200: Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence (2014) and NFRC 500: Procedure for Determining Fenestration Product Condensation Resistance Values (2014).

The windows were simulated using WINDOW 6 and THERM 6 computer programs as specified in ANSI/NFRC 100 and ANSI/NFRC 200. The most currently approved spectral data files from NFRC were also used. The WINDOW program models the one-dimensional heat flow through the center-of-glass portion of the window. The THERM program models the two-dimensional heat flow through the frame, edge-of-glass, divider, and divider-edge portions of the window. The input data for both programs is based on manufacturer's specifications. Defaults for material thermal and optical properties are given in the computer programs. When values other than defaults were used, they are

Ratings values included in this report are for submittal to an NFRC-licensed IA and are not meant to be used directly for labeling purposes. Only those values identified on a valid Certification Authorization Report (CAR) by an NFRC accredited Inspection Agency (IA) are to be used for labeling purposes.

The values included in this report are not considered in compliance with ANSI/NFRC 100, ANSI/NFRC 200, and/or NFRC 500 unless the associated validation test requirements have been satisfied, as applicable.

DISCLAIMER:

This window simulation report was generated by MMM Group of Kitchener, ON. The report relates only to the items specified.

No part of this report may be reproduced except in full, without the written consent of MMM Group

MMM Group and its employees neither endorse nor warrant the suitability of the product simulated. Every effort was taken to accurately model the performance of the windows documented in this report. Because of the large amount of input data and analyses, it is possible that errors or omissions could occur.

Neither MMM Group nor any of its employees shall be responsible for any loss or damage resulting directly or indirectly from any default, error, or omission.

SIMULATION NOTES

- 1 This is an "ANSI/NFRC 100: Procedure for Determining Fenestration Product U-Factors" Certification Report.
- 2 This is an "ANSI/NFRC 200: Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence" Certification Report.
- 3 This is an "NFRC 500: Procedure for Determining Fenestration Product Condensation Resistance Values" Certification Report.
- 4 Unit conversions and rounding are performed according to NFRC 601.
- 5 All glazing surface emissivities are assumed to be 0.84 unless otherwise stated.
- 6 The gas fill method is single probe with 90% argon fill.
- 7 Unless otherwise stated. All non-continuous hardware that does not create a thermal bridge such as hinges, balances, locks etc. are not modeled.
- 8 Where applicable, the following materials are used (Conductivity in W/mK): ADCO PIB-8 HSNB Gray (0.155), Cardinal Stainless Steel (14.187), Edgetech Silicone Foam S1 (0.19), Edgetech Silicone Foam S2 (0.102), Edgetech EPDM (0.127), GED Stainless Steel (13.63), TrueSeal Technologies Butyl 761-71X (0.231).

NFRC - U-Value Baseline Product

Manufacturer: Windspec Inc.

Product line: 720 Single Slider

Product Type: HSOX

Frame: Thermally Broken Aluminum

Report number: WIN16042w-b

Date: 2/10/2016

Revised date:

CPD:

Mfr contact: Oren Anava

Simulator in Responsible Charge:

IA Name:

Product Description	SB60-arg-Cl, ts		
Glass Thick 1 (in)	0.223		
Glass Thick 2 (in)	0.225		
Glass Thick 3 (in)			
Glass Thick 4 (in)			
Glass Thick 5 (in)			
# of Glazing Layers	2		
Surface # 2 Emissivity	0.03		
Surface # 3 Emissivity			
Surface # 4 Emissivity			
Surface # 5 Emissivity			
Surface # 6 Emissivity			
Surface # 7 Emissivity			
Surface # 8 Emissivity			
Gap 1	0.528		
Gap 2			
Gap 3			
Gap 4			
Validation Size	1500 x 1200 mm		
	59.055 x 47.244 in		
Spacer Type	ZF-D		
Grid	N		
Gap Fill	Air (10%) / Argon (90%) Mix		
U-Value	0.45		

ID	Name	No. of Layers	Mode	Tilt	Environmental Conditions	Keff (Btu/h*ft² F)	Overall Thickness (in)	Uval (Btu/h* ft² F)	SHGC	Visible Transmittance
13	SB60-arg-Cl	2	#	90	NFRC 100-2010	0.015	1.000	0.246	0.386	0.702

NFRC Simulation Data – Summary

Manufacturer:	Windspec Inc.
Series/Model # :	720 Single Slider

Spacer: Superspacer Triseal with silicone secondary seal (ts).

Operator Type:	HSOX	Sim Lab Code:	SEEL
Model Size:	1500 x 1200	Report number:	WIN16042w-b
Thermal Break:	U	Date:	2/10/2016
		Revised Date:	
		Rating Procedure:	2014


Mfr Product Code	Product Number	Gap 1 (in)	Gap 2 (in)	Gap Fill 1	Gap Fill 2	Emissivity Surface 2	Emissivity Surface 3	Emissivity Surface 4	Emissivity Surface 5	Tint	Spacer	Grid Type	Grid Size	U-Factor (Btu/h*ft²F)	SHGC	VT	*CR
SB60-arg-Cl, ts	0001	0.53		ARG		0.03				CL	ZF-D	N		0.45	0.30	0.50	42

* Note: The Condensation Resistance results obtained from this procedure are for controlled laboratory conditions and do not include the effects of air movement through the specimen, solar radiation, and the thermal bridging that may occur due to the specific design and construction of the fenestration system opening.


APPENDIX A

Product Drawings


720 SLIDER SERIES

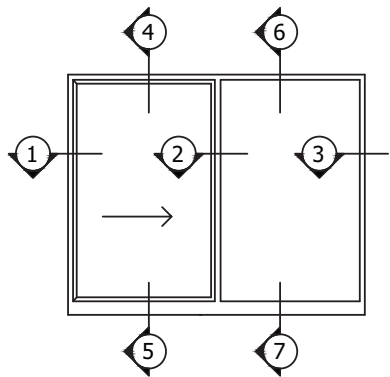


ELEVATION




1 DETAIL




2 DETAIL

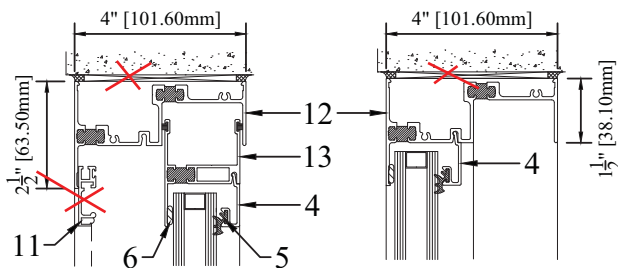


4 DETAIL




6 DETAIL



3 DETAIL

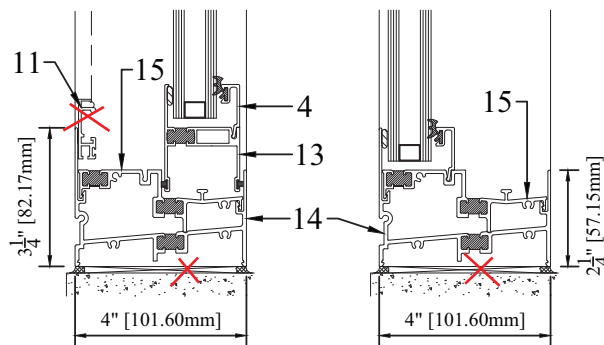

5 DETAIL




7 DETAIL

#	DIE #	DESCRIPTION
1	W-72004	Side Slider Locking Jamb
2	W-74011	Lock Handle
3	W-72008	Side Slider Pull Rail
4	W-72012	1" Glass Stop
5	N/A	Gascket
6	R-00006	Polishim Tape
7	W-72007	Side Slider Meeting Rail
8	W-72010	Side Slider Meet Rail Cover
9	W-72006	Side Slider Interlocking Mullion
10	W-72005	Fix Glazing Unit Frame
11	N/A	Screen
12	W-72001	Side Slider Header
13	W-72009	Side Slider Sash Rail
14	W-72022	Side Slider Lower Sill 4 x 3
15	W-72023	Side Slider Low Sill Adaptor


WINDSPEC INC.


MANUFACTURERS OF HIGH PERFORMANCE 'WINDSPEC' WINDOWS
ALUMINUM ENTRANCE SYSTEMS AND ARCHITECTURAL PANELS
1310 CREDITSTONE RD, CONCORD, ONTARIO L4K 5T7
Telephone (905) 738 - 8311 Fax (905) 738 - 6188

720 SLIDER SERIES

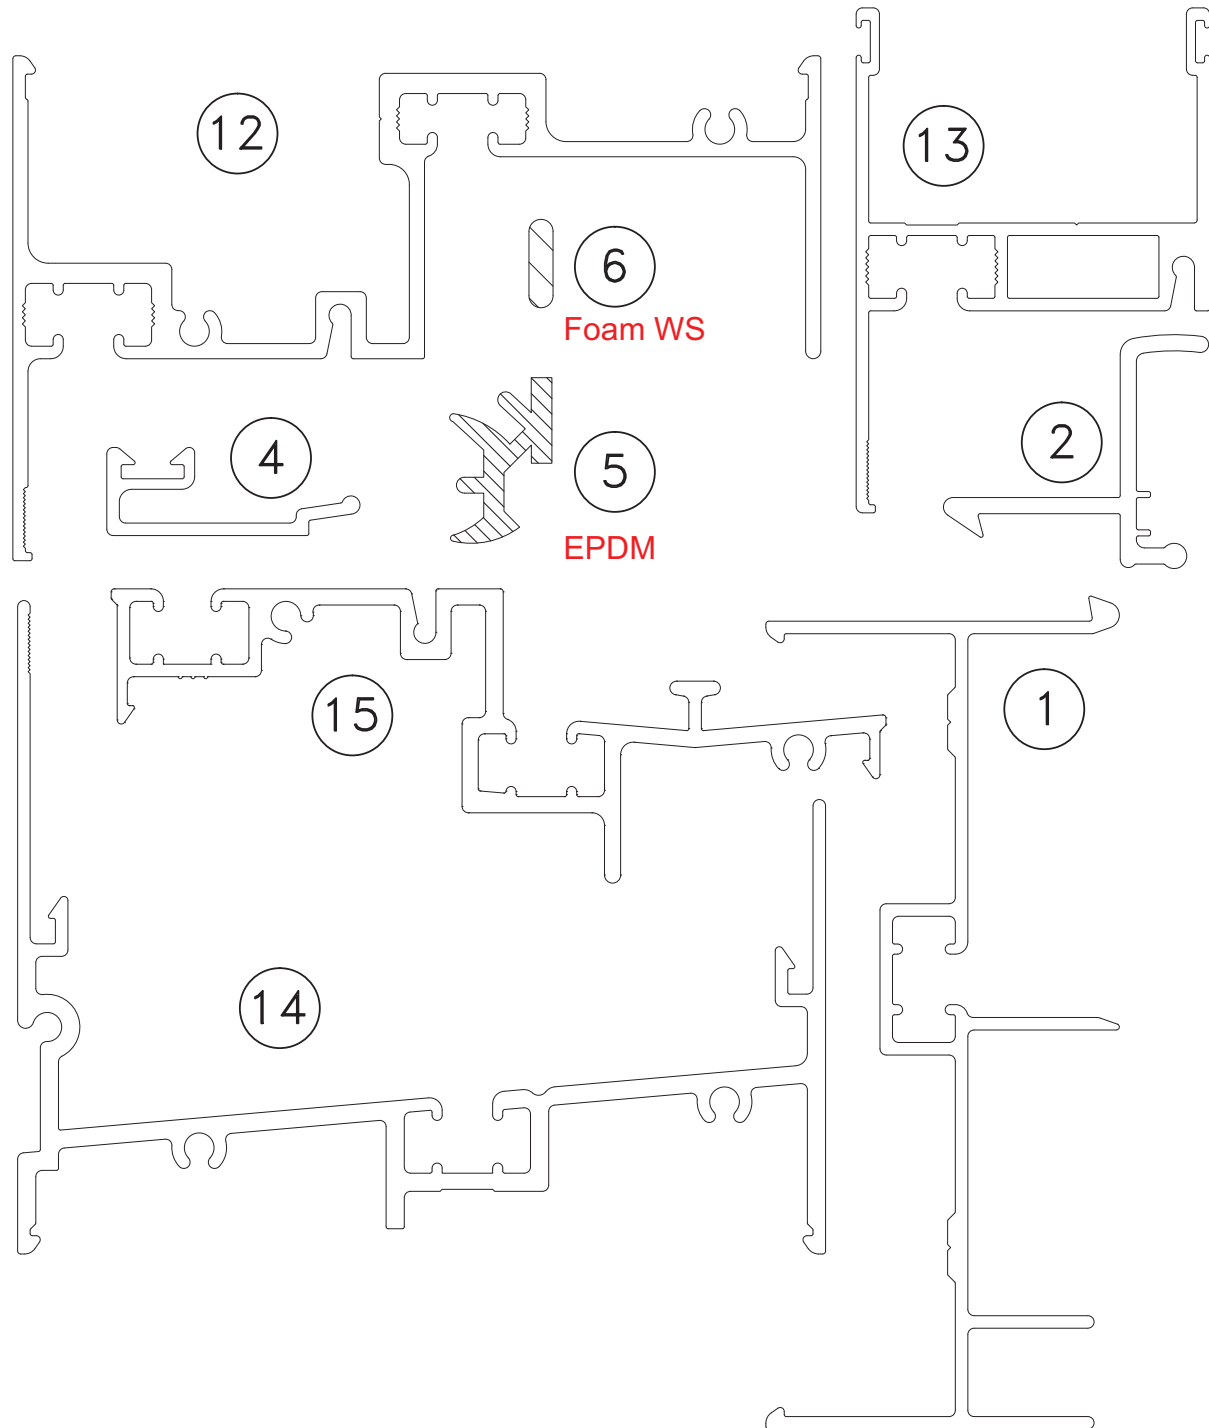

WINDSPEC INC.
MANUFACTURERS OF HIGH PERFORMANCE 'WINDSPEC' WINDOWS
ALUMINUM ENTRANCE SYSTEMS AND ARCHITECTURAL PANELS
1310 CREDITSTONE RD, CONCORD, ONTARIO L4K 5T7
Telephone (905) 738 - 8311 Fax (905) 738 - 6188


720 SLIDER SERIES

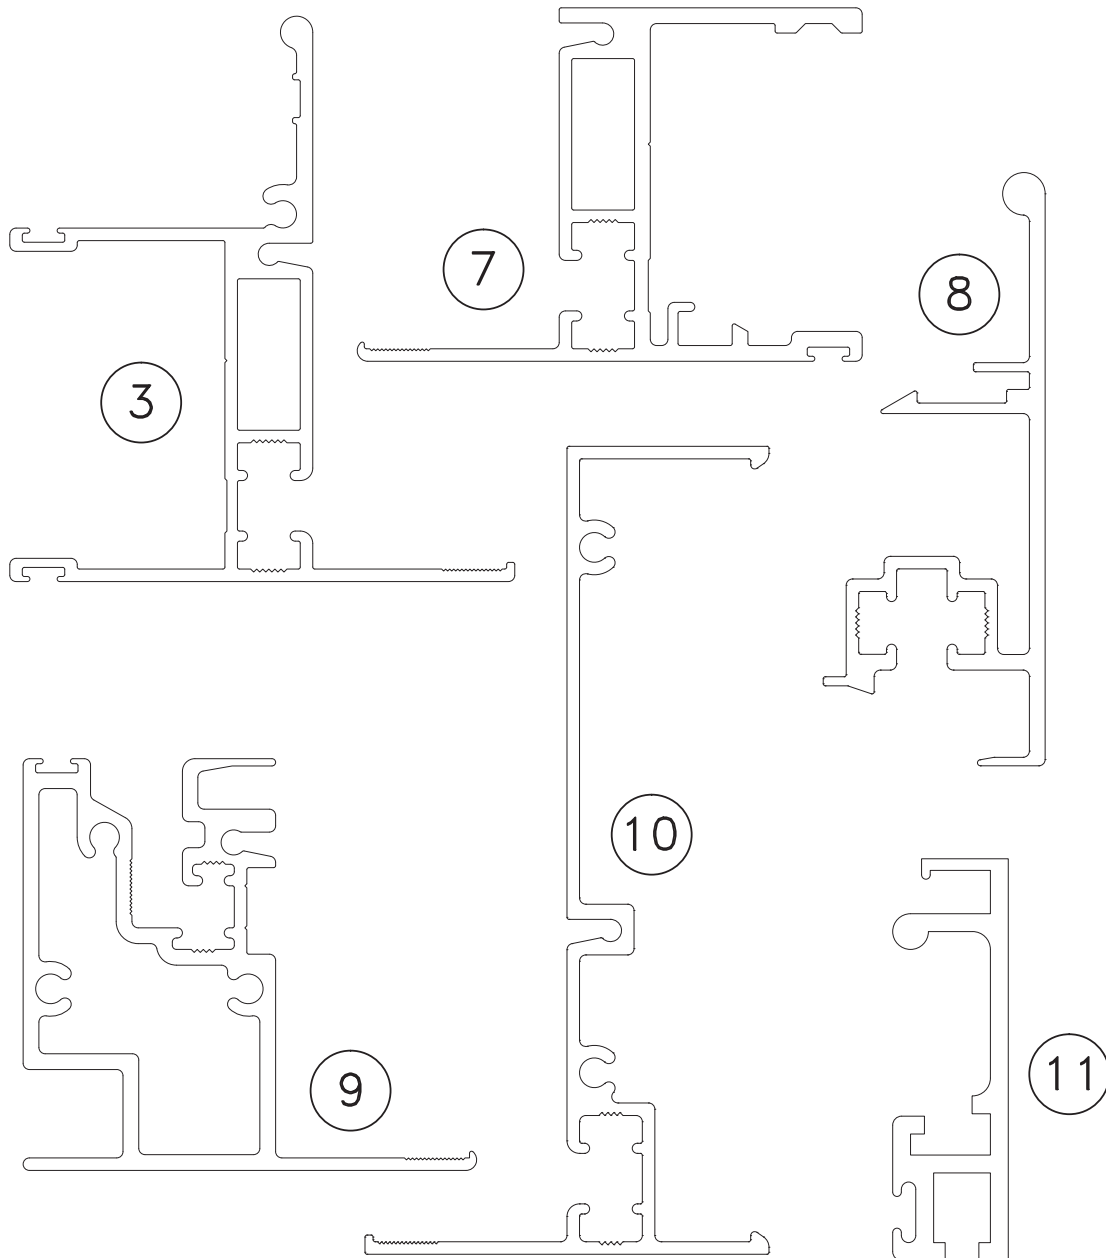

WINDSPEC INC.
MANUFACTURERS OF HIGH PERFORMANCE 'WINDSPEC' WINDOWS
ALUMINUM ENTRANCE SYSTEMS AND ARCHITECTURAL PANELS
1310 CREDITSTONE RD, CONCORD, ONTARIO L4K 5T7
Telephone (905) 738 - 8311 Fax (905) 738 - 6188

720 SLIDER SERIES

Painted Aluminum Alloy
Urethane Thermal Break

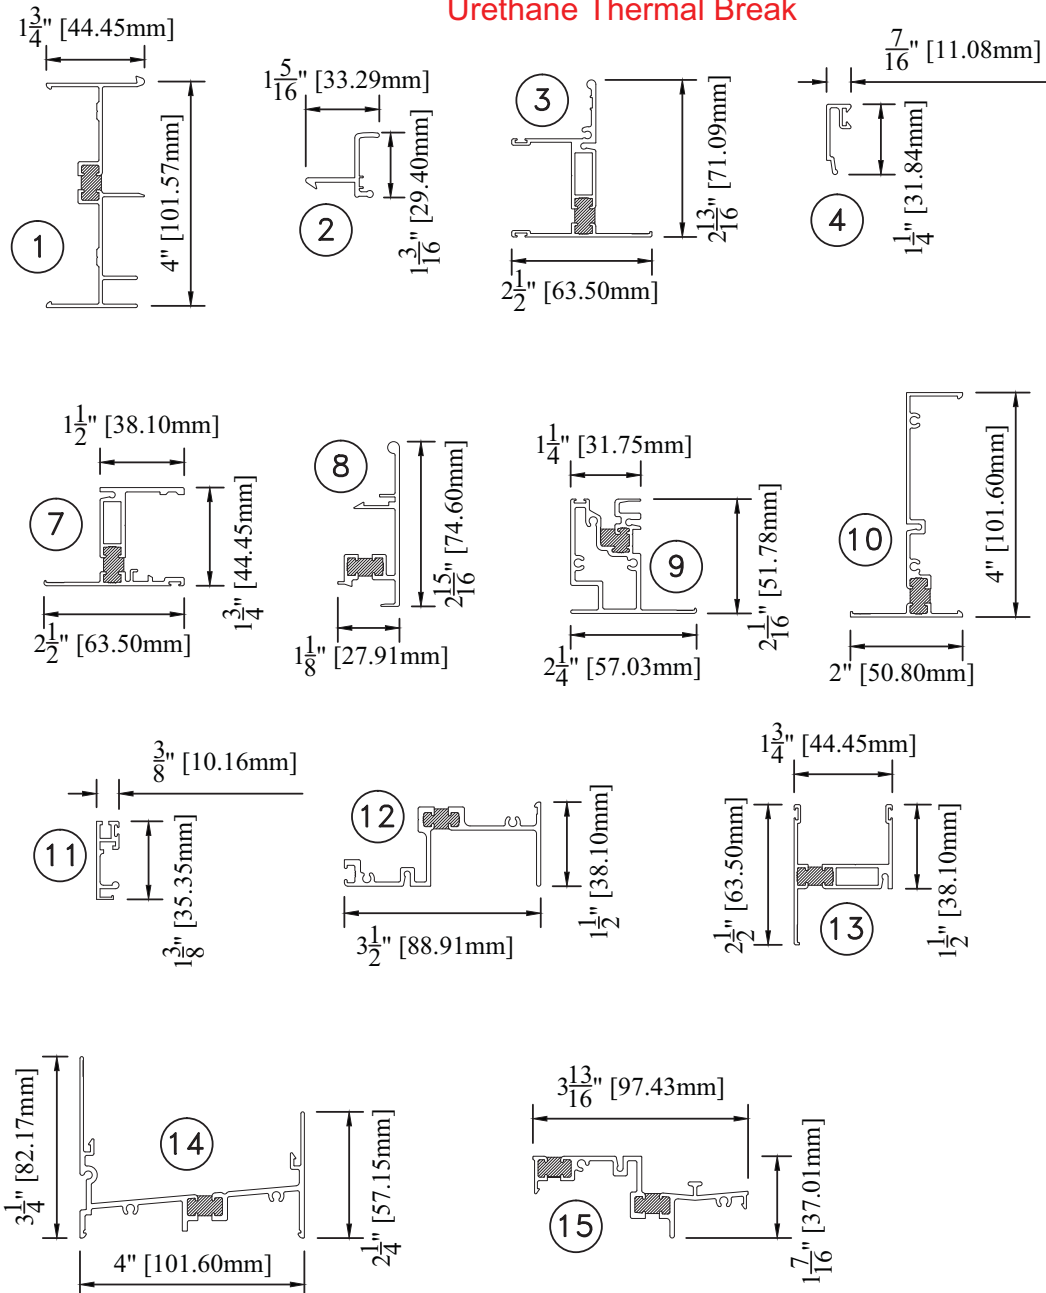

WINDSPEC

MANUFACTURERS OF HIGH PERFORMANCE 'WINDSPEC' WINDOWS
ALUMINUM ENTRANCE SYSTEMS AND ARCHITECTURAL PANELS
1310 CREDITSTONE RD, CONCORD, ONTARIO L4K 5T7
Telephone (905) 738 - 8311 Fax (905) 738 - 6188

